

ATC SURVEILLANCE MINIMUM
ALTITUDE CHART
ZSPD/PVG


VAR5.8°W

1M-1

SHANGHAI/Pudong
AD ELEV 3.5m

D-ATIS(English) 127.85	D-ATIS(Chinese) 128.65	Shanghai Approach					
		APP01 120.3 (119.75)	APP02 125.4 (124.05)	APP03 125.85 (119.2)	APP04 123.8 (119.2)	APP05 126.65 (128.05)	APP06 126.3 (120.65)
Shanghai Approach							
APP07 121.1 (119.75)	APP08 127.75 (124.05)	APP09 121.375 (128.05)	APP10 125.625 (120.65)	APP11 119.075 (128.05)	APP12 119.975 (120.65)	APP13 120.825 (124.875)	APP14 124.725 (119.75)
Pudong Tower						TL 3600 TA 3000 3300(QNH≥1031hPa) 2700(QNH≤979hPa)	
TWR01(17L/17R/35L/35R) 118.8 (118.325)		TWR02(16L/16R/34L/34R) 118.4 (118.725)		TWR03(17R/35L) 124.35 (118.325)			

- Notes:
- 1. The chart only to be used for cross-checking of altitudes assigned while under surveillance control.
 - 2. Radio Communication failure procedure refer to CHINA AIP ZSSS and ZSPD AD2.22 item 5.
 - 3. Obstacles for Surveillance Vectoring Sectors refer to AIP CHINA ZSSS and ZSPD AD2.10;
 - 4. Scope of Surveillance Vectoring Sectors refer to AIP CHINA ZSSS AD2.22.

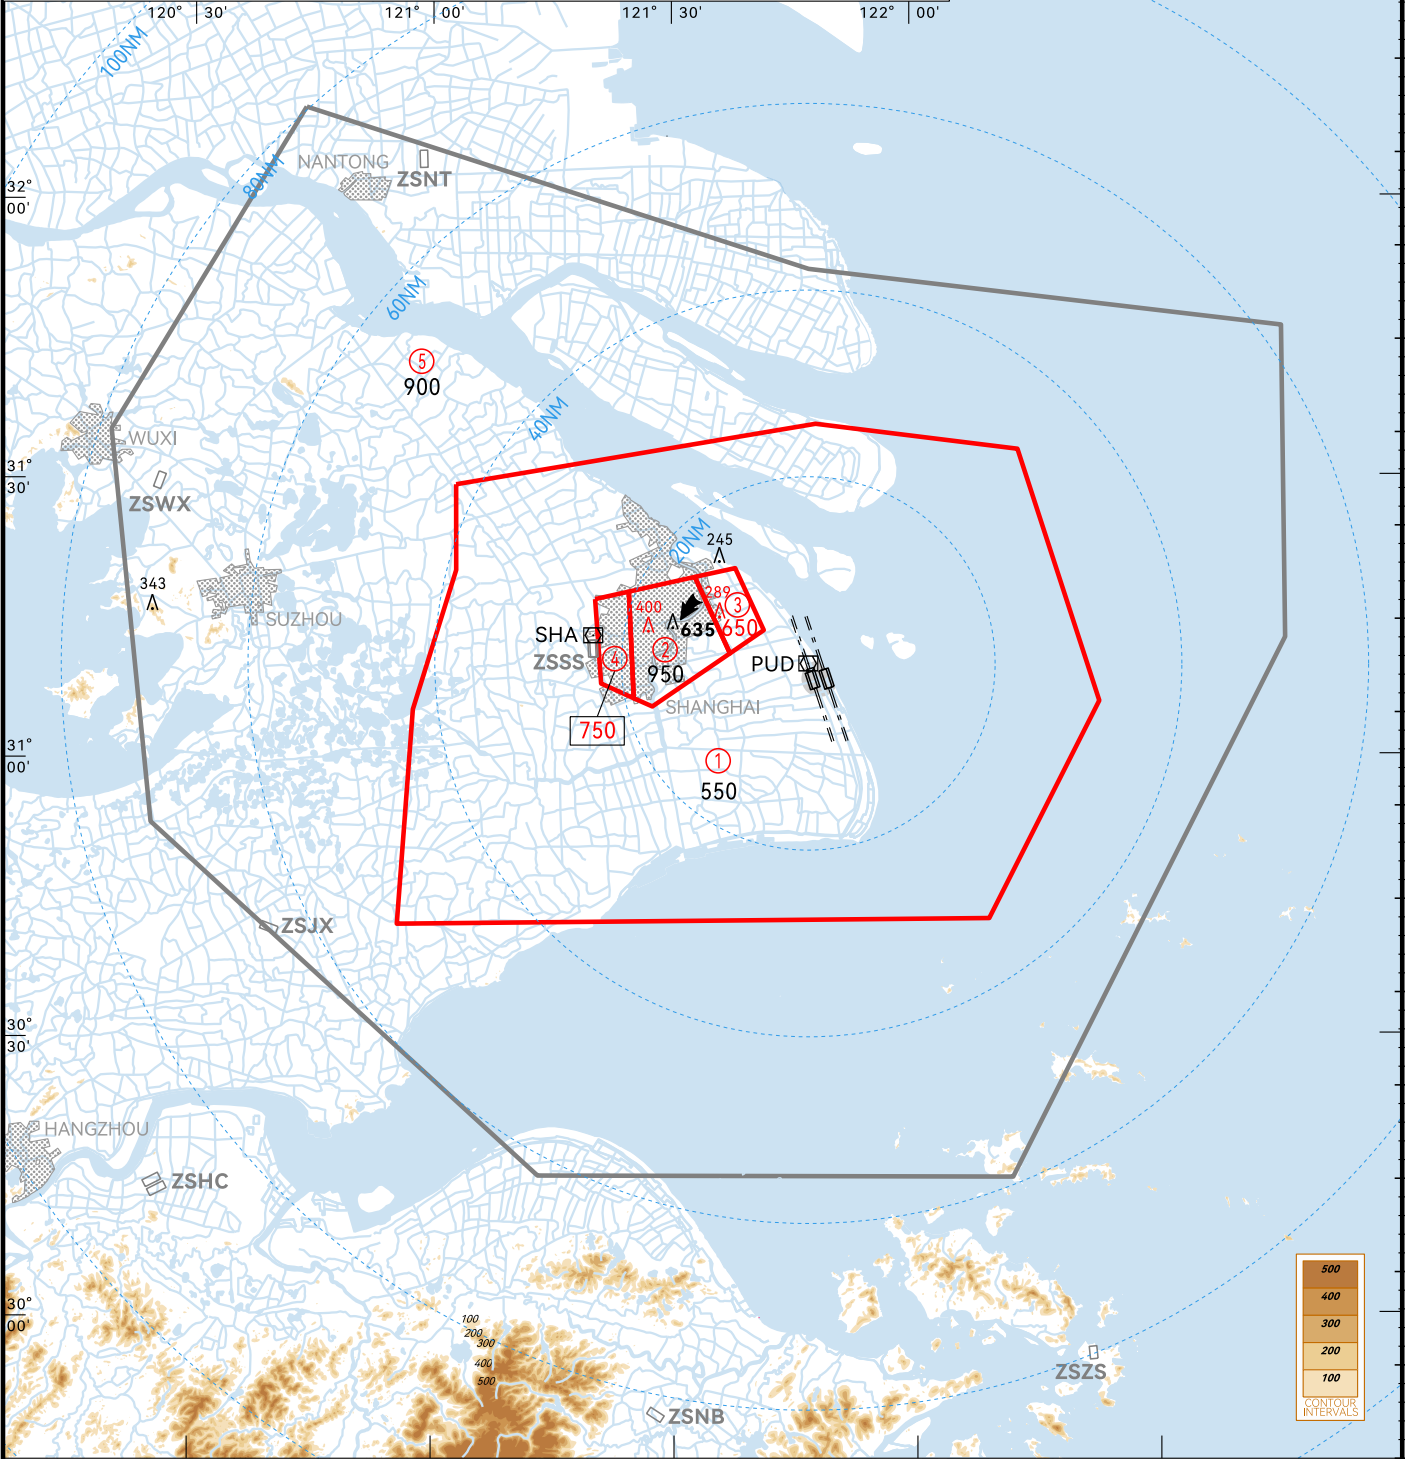

Changes: SECTORS, OBST.